


LCD SPACEVIEW

5-9/9-13





- **XXL Screen**
- **4 Light sensors for high sensitivity**
- **TIG welding > 2A**
- **External adjustment : shade or grinding**
- **Internal adjustment : sensitivity, delay**
- **Shade : 5-9 / 9-13**
- **5-9 Shade range : for low intensity**

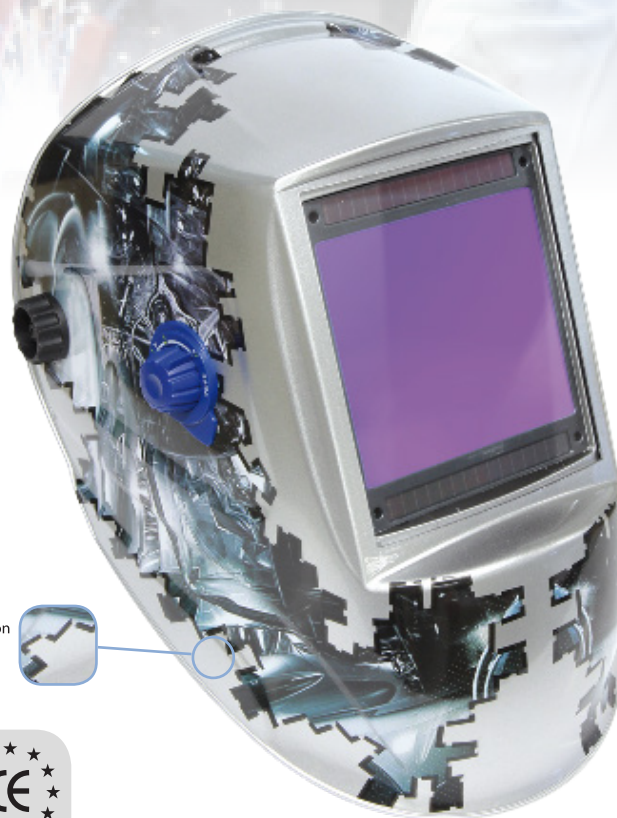

Ref. 040717

► TECHNICAL DATA

Classification	1/1/1/2
Clear shade	4
Dark shade	5-9 / 9-13
Reaction speed	0.0001 sec
Back to clear speed	Auto
Field of vision	100x93 mm
Power supply	Solar + battery (CR2032)
Weight	530 g
Adjustable	Sensitivity, delay, shade, grinding
Light sensor	4
Applications	MMA 5►400 / TIG 2►300 / MIG-MAG 5►400
Standards	EN 175 / EN 379



Sensitivity



Delay



Shade

► ACCESSORIES

