

# PLASMA CUTTING RANGE

PRESTOJET 25i · PRESTOJET 60 · PRESTOJET 100



**SAF-FRO**

## CHOOSE SAF-FRO FOR CLEAN, EFFICIENT AND COST-EFFECTIVE PLASMA CUTTING



# VALUE FOR MONEY

Cut through any conductive material in seconds.

Choose a model just right for your typical material thickness. Our plasma cutters are as good as the best in Class, with prices far below competitors (the machine as well as the consumable parts).

**PRESTOJET 25i** – portable, flexible cutting power up to 10 mm, powered from a standard 230V input supply, ideal for work on site.

**PRESTOJET 60 & 100** – high performance plasma cutting machines, built to handle harsh environmental conditions, suitable for operation on site with a generator or within a workshop environment.

Up to 25 mm mild steel (PRESTOJET 60) and up to 40 mm mild steel (PRESTOJET 100).

**ALL MACHINES**

## BUILT FOR THE HEAVIEST INDUSTRIAL CONDITIONS

Developed and tested under the hardest conditions (TRUE HD) to grant the reliability you need.

- PCB board made in Lincoln Electric Company
- Fully encapsulated and vertically mounted
- Capable of surviving the harshest testing conditions
- Varnished and potted electronic boards



IP TEST



CLIMATE TEST




VIBRATION TEST



DUST TEST



DROP TEST




Recommended	Maximum	Severance
Rated Cut @ 0,47 m/min	Maximum Cut @ 0,2 m/min	Sever Cut @ 0,11 m/min

# PRESTOJET 25i

- Flexible: only 230 V input required.
- High performance: innovative advanced electrode and nozzle design.
- Robust: long life compressor.
- Portable: only 18,5 kg, small and compact.
- Different materials: mild steel, stainless steel, aluminium and many more.
- Concentrated plasma stream: less heat input, less distortion.
- Internal compressor or external.

## PERFORMANCE

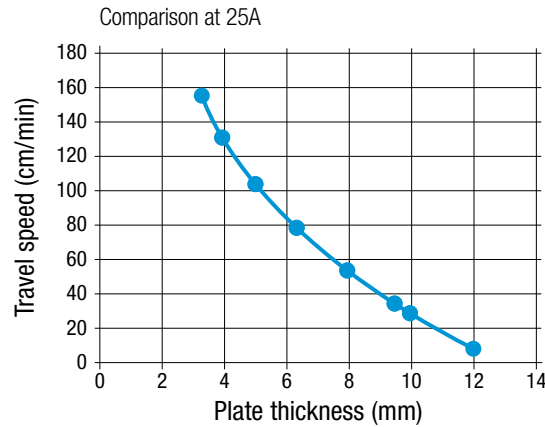

PRESTOJET 25i  
external compressed air



### PRESTOJET 25i MOTOR GENERATOR COMPATIBILITY:

- minimum power 4kW
- Vac peak voltage: below 410V.
- RMS voltage of the AC waveform: 230Vac ± 10%.

INTERNAL  
COMPRESSOR OR  
EXTERNAL AIR



### PROCESSES

- Plasma cutting

### APPLICATIONS

- On site maintenance
- Service tasks
- Small construction sites
- General installations
- Air ducting installation (HVAC)
- Demolition work
- Rental

### INPUT



### OUTPUT



### Unit includes

- 2 m input cable with 16A plug
- Mounted 3 m hand cutting torch
- Ground clamp and cable
- Air connection kit
- Cutting torch consumables kit



www.lincolnelectric.com/green

## SPECIFICATION

Product	Item Number	Primary Voltage (50-60Hz)	Rated Output	Cutting Capacity (mm)	Flow Rate	Inlet Pressure	Output Range (A)	Weight (kg)	Dimensions HxWxD (mm)
PRESTOJET 25i	W000404423	230V/1Ph	25A/90V/35% 20A/88V/60% 15A/86V/100%	10	80l/min +/- 20%@5,0bar	6,0 bar	10-25	18,5	385 x 215 x 480



**PROCESSES**

- Plasma cutting (all)
- Plasma gouging
- Grid Mode

**TYPE OF GAS**

- Air compressed
- Nitrogen

**APPLICATIONS**

- On site maintenance
- Service tasks
- Small construction sites
- General installations
- Air ducting installation (HVAC)
- Demolition work
- Rental

**INPUT**




**OUTPUT**



**Unit includes**

- 2 m-input cable
- 7,5 m-hand cutting torch
- Ground clamp and cable
- Air connection kit
- Cutting torch consumables kit




**MOTOR GENERATOR COMPATIBILITY:**

- minimum power 9,2kW (PRESTOJET 60), 18kW (PRESTOJET 100)
- AC waveform peak voltage below 700V.
- RMS voltage of the AC waveform is always equal to 400Vac ±15%.

**PRESTOJET 60**


CUT PERFORMANCE – MILD STEEL  
Hand Torch



Recommended	Maximum	Severance
Rated Cut @ 0,5 m/min	Maximum Cut @ 0,3 m/min	Sever Cut @ 0,18 m/min

**PRESTOJET 100**

CUT PERFORMANCE – MILD STEEL  
Hand Torch




Recommended	Maximum	Severance
Rated Cut @ 0,38 m/min	Maximum Cut @ 0,32 m/min	Sever Cut @ 0,18 m/min

**PERFORMANCE**


**PRESTOJET 60 with LC65**

Comparison at 60A

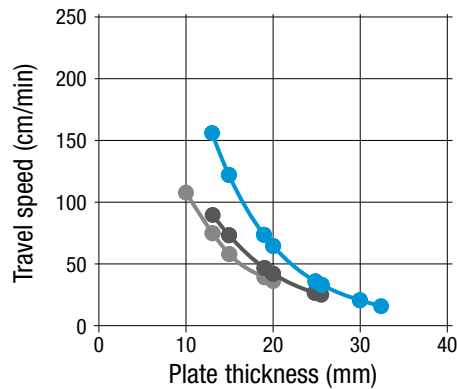

**PRESTOJET 100 with LC105**

Comparison at 100A

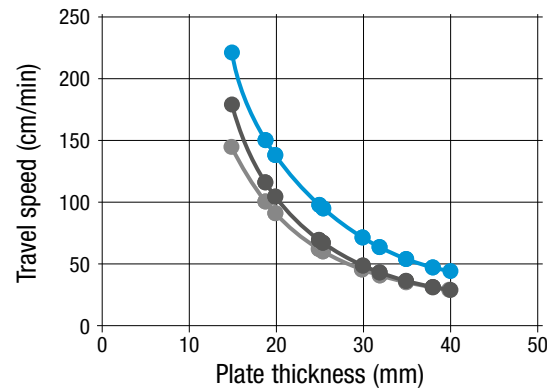

● Aluminium ● Mild ● Stainless

**SPECIFICATION**

Product	Item Number	Primary Voltage (50-60Hz)	Rated Output	Cutting Capacity (mm)	Piercing Capacity (mm)*	Flow Rate	Inlet Pressure	Output Range (A)	Weight (kg)	Dimensions HxWxD (mm)
PRESTOJET 60	W000403594	400V/3Ph	60A/40% 40A/100%	25	Max. 12	130l/min +/- 20%@5,0bar	6,0 bar	20-60	22	389 x 247 x 489
PRESTOJET 100	W000403596		100A/40% 60A/100%	40	Max. 20	280l/min +/- 0%@5,0bar	7,0 bar	20-100	36	455 x 301 x 618

**PRESTOJET 60 & 100**

- Starting: innovative advanced arc starting without HF.
- Performance: innovative advanced electrode and nozzle design.
- Longer lifetime: innovative advanced design increases lifetime of consumables.
- Faster: higher travel speeds and plate thickness.
- Flexible: multiple torch configurations.
- Different materials: mild steel, stainless steel, aluminium and many more.
- Concentrated plasma stream: less heat input, less distortion.
- Torch Connection – central connector, 9-pin.
- Stepless current control.
- Remote kit (optional) that allows the unit to receive an external ON-OFF trigger for mechanized processes (only for PRESTOJET 100).

**AS GOOD AS THE BEST IN CLASS, WITH PRICES FAR BELOW**



## KEY OPTIONS

		PRESTOJET 25i	PRESTOJET 60	PRESTOJET 100
Product Number		W000404423	W000403594	W000403596
Air Filter LAF1250	W88X1456A	•	•	•
Filter Cartridge	W8800117R	•	•	•
Cutting circle	W0300699A	•	•	•
Undercarriage	W0200002	•		
Undercarriage	K2694-1		•	•
Remote Control	K12049-1			•
Remote Control Kit	W05X1086A			•
Bevel Tool	W03X0893-119A		•	•

## TORCHES

		PRESTOJET 25i	PRESTOJET 60	PRESTOJET 100
Product Number		W000404423	W000403594	W000403596
LC25 (Hand)	PTH-C25A-SL-3MR	•		
LC65 (Hand)	PTH-061A-CX-7M5A		•	
	PTH-061A-CX-15A		•	
LC65M (Machine)	PTM-061A-CX-7M5A		•	
	PTM-061A-CX-15A		•	
LC105 (Hand)	PTH-101A-CX-7M5A			•
	PTH-101A-CX-15A			•
LC105M (Machine)	PTM-101A-CX-7M5A			•
	PTM-101A-CX-15MA			•

## UNDERCARRIAGE

W0200002



## UNDERCARRIAGE

K2694-1



## AIR FILTER LAF1250

Sub-micron filter for compressed air designed to remove moisture, oils and sprays particles from air compressors, thus providing clean, free of oil and dry air.

W88X1456A

W8800117R (filter cartridge)



## BEVEL TOOL

W03X0893-119A



## CUTTING CIRCLES

(max diam. 820 mm)

W0300699A






# MODERN TORCH TECHNOLOGY

## LC65 and LC105

– the new torches with longer life time (running cooler). More cutting thickness, higher speed, standard and grid cutting.


- NO HF
- Small electrode diameter
- High air-flow
- High speed rotating air
- Primary and secondary flow
- Concentrated plasma
- Long life electrodes and nozzles
- Torch Connection –central connector, 9-pin

**ALSO AVAILABLE:  
EXTENDED REACH  
CONSUMABLES  
HELPFUL  
FOR CONFINED  
SPACES**

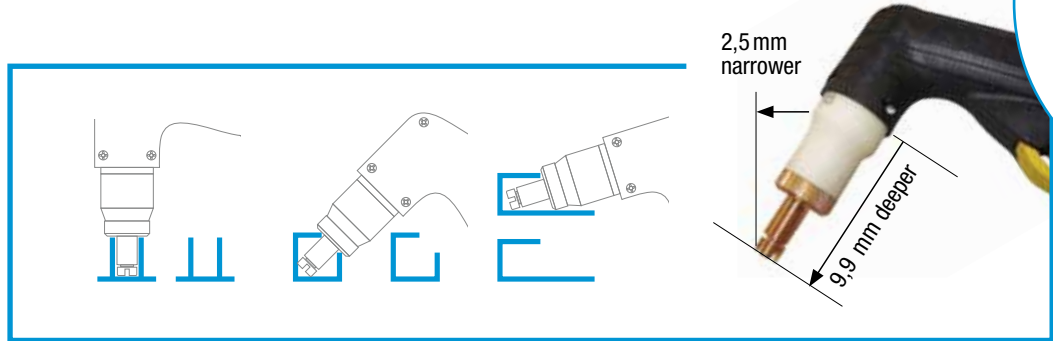

For connection equipment /torch the Tomahawk are provided by **CENTRAL CONNECTOR**

**HIGHER TRAVEL  
SPEED AND  
LONGER LIFE TIME  
CONSUMABLES**

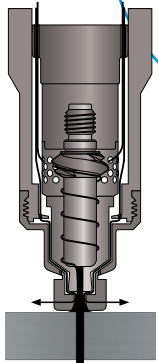

LC105 torch design with drag cup



Small diameter Electrode with "screw"

Air-flow through "diagonal" drilled holes in the direction of the "screw"

As a result high speed circular air flow around the electrode

Cooling

Primary Plasma beam in the middle. Secondary air stream with cold air concentrating the Plasma beam

Secondary air-stream cold  
Plasma Beam hot

CONTACT OPTION 1	STAND-OFF OPTION 2	GOUGE OPTION 3
Convenient for the operator, simply drag the nozzle on the plate. Well protected nozzle.	Maximum flexibility and visibility of the plasma stream.	Allowing you to gouge different materials.



## GOUGING WITH PRESTOJET 60 & 100

Plasma gouging was developed as a tool for weld removal and weld preparation. Back-gouging was used to remove metal from the reverse side of arc-welded joints to eliminate defects and improve strength. Weld defects such as cracks, porosity, and lack of fusion could be gouged out using a plasma torch and then repaired with a new, sound weld.

### PRESTOJET 60

*Gouging application with manual plasma torch LC65*

Material : Mild Steel  
 Suggested speed : 90 cm/min  
 Suggested torch inclination: 55° from vertical  
 Suggested Air pressure : 4,0-4,5 bar  
 Print on metal piece : 0,066 cm<sup>2</sup>  
 Material removal capability : 6 cm<sup>3</sup>/min.

### PRESTOJET 100

*Gouging application with manual plasma torch LC105*

Material : Mild Steel  
 Suggested speed : 90 cm/min  
 Suggested torch inclination: 55° from vertical  
 Suggested Air pressure : 4,0-4,5 bar  
 Print on metal piece : 0,111 cm<sup>2</sup>  
 Material removal capability : 10 cm<sup>3</sup>/min.

	LC65	LC105
Torch (Hand 7,5 m) (1 pc)	<b>PTH-061A-CX-7M5A</b>	<b>PTH-101A-CX-7M5A</b>
Torch (Hand 15 m) (1 pc)	<b>PTH-061A-CX-15MA</b>	<b>PTH-101A-CX-15MA</b>

# 10/12 mm

## LC 25 (Hand)

LC 25 Hand 3M | PTH-C25A-SL-3MR



Part	Quantity	Reference
Electrode	10	W03X0893-75A
Gas distributor	3	W03X0893-5R
Tip shielded - 25A	10	W03X0893-76A
Shield cap body	1	W03X0893-77A
Spacer 40 - 80A	3	W03X0893-78R



**PLASMA-BOX LC25**  
W03X0893-118A



# 25/30 mm


## LC 65 (Hand)

LC 65 Hand 7,5M	PTH-061A-CX-7M5A
LC 65 Hand 15M	PTH-061A-CX-15MA



**LC 65**

**Air cooled**  
130 l/min@5,0 bar  
60A@60%  
25mm mild steel  
30mm severance

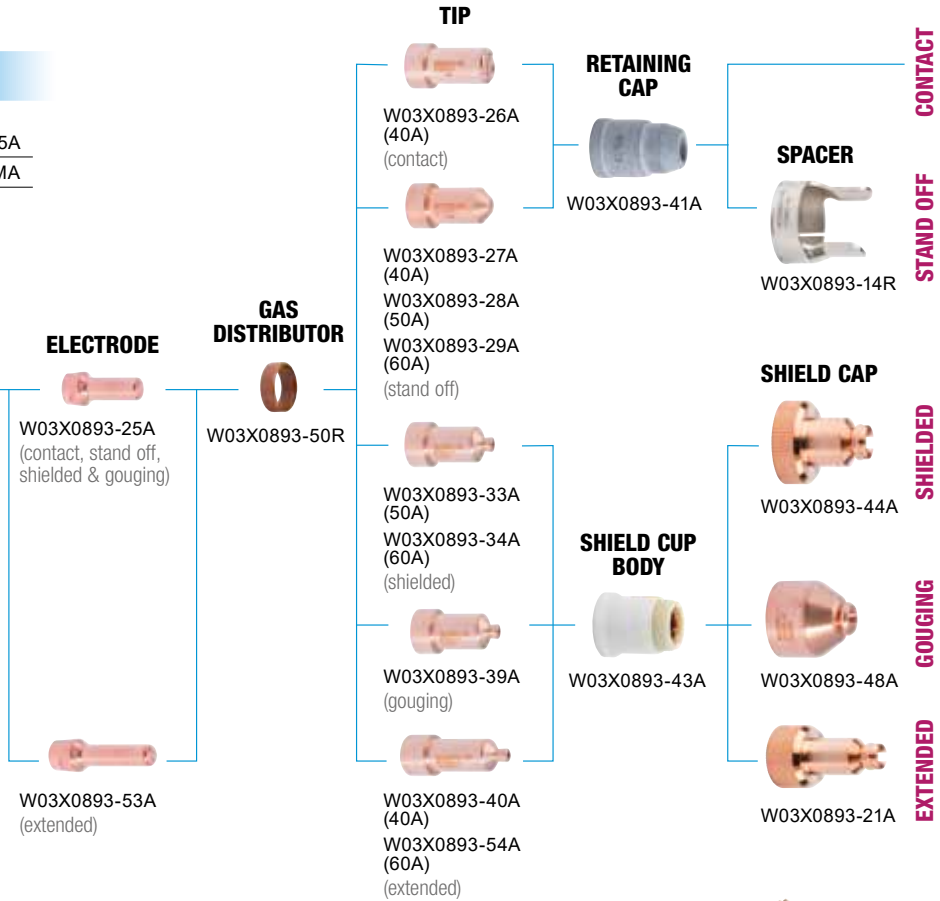

Part	Quantity	Reference
Electrode	25	W03X0893-25A
	3	W03X0893-53A
Gas distributor	2	W03X0893-50R
	10	W03X0893-29A
Tip	5	W03X0893-34A
	3	W03X0893-39A
	3	W03X0893-54A
	1	W03X0893-41A
Retaining cap	1	W03X0893-41A
Shield cap body	1	W03X0893-43A
Spacer	1	W03X0893-14R
Shield cap	1	W03X0893-44A
	1	W03X0893-48A
	1	W03X0893-21A
O-ring	2	-
Silicone lubricant for o-ring	1	-



**PLASMA-BOX LC65**  
W03X0893-113A


## LC 65M (Machine)

LC 65M Machine 7,5M	PTM-061A-CX-7M5A
LC 65M Machine 15M	PTM-061A-CX-15MA



**LC 65M**


**Air cooled**  
130 l/min@5,0 bar  
60A@60%  
25mm mild steel  
30mm severance

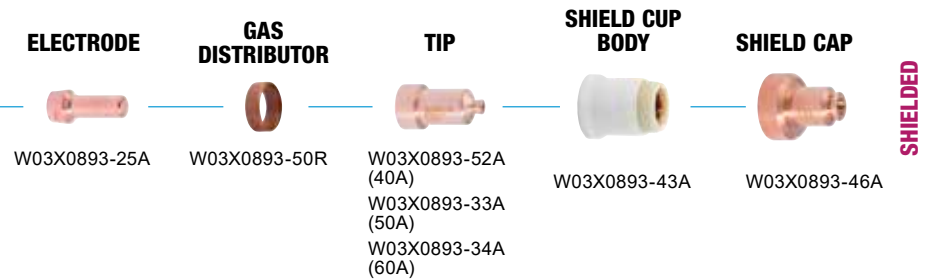

# 40/45 mm

## LC 105 (Hand)

LC 105 Hand 7,5M	PTH-101A-CX-7M5A
LC 105 Hand 15M	PTH-101A-CX-15MA

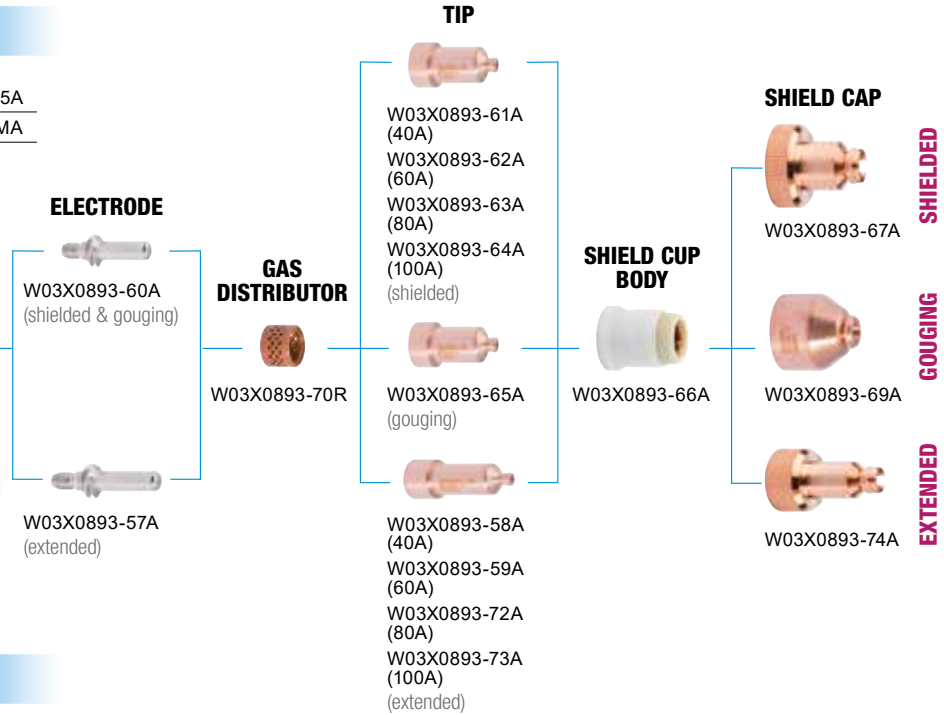


Part	Quantity	Reference
Electrode	20	W03X0893-60A
	3	W03X0893-57A
Gas distributor	2	W03X0893-70R
Tip	5	W03X0893-62A
	15	W03X0893-64A
	5	W03X0893-65A
	3	W03X0893-73A
Shield cap body	1	W03X0893-66A
	1	W03X0893-67A
Shield cap	1	W03X0893-69A
	1	W03X0893-74A
	2	-
O-ring	2	-
Silicone lubricant for o-ring	1	-



**PLASMA-BOX LC105**  
W03X0893-115A

## LC 105M (Machine)

LC 105M Machine 7,5M	PTM-101A-CX-7M5A
LC 105M Machine 15M	PTM-101A-CX-15MA

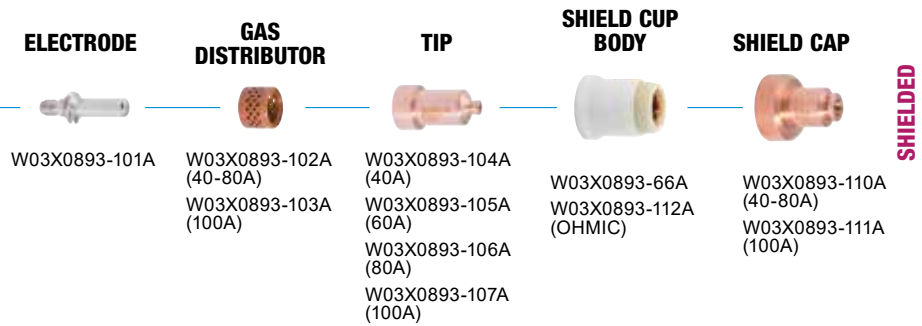

Part	Quantity	Reference
Electrode	20	W03X0893-101A
Gas distributor	1	W03X0893-102A
	2	W03X0893-103A
	5	W03X0893-105A
Tip	10	W03X0893-106A
	20	W03X0893-107A
	1	W03X0893-112A
Shield cap body	2	W03X0893-110A
	2	W03X0893-111A
O-ring	2	-
Silicone lubricant for o-ring	1	-



**PLASMA-BOX LC105M**  
W03X0893-117A







[www.saf-fro.com](http://www.saf-fro.com)

**CUSTOMER ASSISTANCE POLICY**

The business of Lincoln Electric is manufacturing and selling high quality welding equipment, consumables, and cutting equipment. Our challenge is to meet the needs of our customers and to exceed their expectations. On occasion, purchasers may ask Lincoln Electric for information or advice about their use of our products. Our employees respond to inquiries to the best of their ability based on information provided to them by the customers and the knowledge they may have concerning the application. Our employees, however, are not in a position to verify the information provided or to evaluate the engineering requirements for the particular weldment. Accordingly, Lincoln Electric does not warrant or guarantee or assume any liability with respect to such information or advice. Moreover, the provision of such information or advice does not create, expand, or alter any warranty on our products. Any express or implied warranty that might arise from the information or advice, including any implied warranty of merchantability or any warranty of fitness for any customers' particular purpose is specifically disclaimed.

Lincoln Electric is a responsive manufacturer, but the selection and use of specific products sold by Lincoln Electric is solely within the control of, and remains the sole responsibility of the customer. Many variables beyond the control of Lincoln Electric affect the results obtained in applying these types of fabrication methods and service requirements.

Subject to Change – This information is accurate to the best of our knowledge at the time of printing. Please refer to [www.lincolnelectriceurope.com](http://www.lincolnelectriceurope.com) for any updated information.